

DET Premium Cabinets

DESCRIPTION

Our Sframe™ DET Premium Cabinets are designed to accommodate heavier rack-mount equipment such as servers and power supplies while offering convenient entry points for any installation and maintenance tasks.

FEATURES

- half-height 92380 locked side panels for easy access
- mounting posts with unit notation
- rugged frame to support heavy loads
- cable entry ports in cabinet base and top
- swing-out rotary 92380 lock on doors





SPECIFICATIONS

- 19-inch mounting width suitable for most networking equipment
- Conforms to industry standard ANSI/EIA-310-D and IEC 60297-3 mounting configuration
- Up to 1300kg (2866lbs) static load capacity
- Body and frame fabricated from cold rolled steel
- Matte black powder-coated finish (also available in white)
- All door/side panel locks are coded to L&F 92380 (180 Style)



FRAME ASSEMBLY

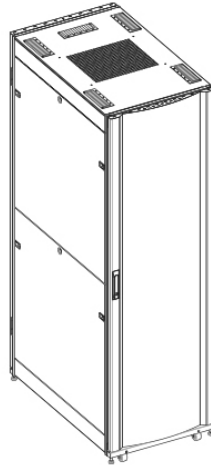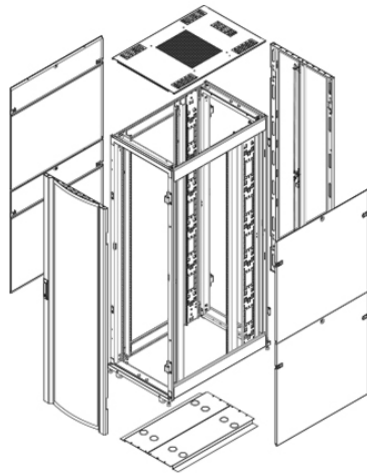

CONFIGURATIONS

Sframe™ DET Premium Cabinets are offered in the following standard configurations

RACK UNITS	HEIGHT	WIDTH	DEPTH	PART NUMBER
18U	935mm (36.81 inches)	800mm (31.50 inches)	800mm (31.50 inches)	DLDET18U88
27U	1320mm (51.97 inches)	600mm (23.62 inches)	800mm (31.50 inches)	DLDET27U68
			1000mm (39.37 inches)	DLDET27U610
		800mm (31.50 inches)	800mm (31.50 inches)	DLDET27U88
			1000mm (39.37 inches)	DLDET27U810
42U	2000mm (78.74 inches)	600mm (23.62 inches)	800mm (31.50 inches)	DLDET42U68
			1000mm (39.37 inches)	DLDET42U610
			1200mm (47.24 inches)	DLDET42U612
		800mm (31.50 inches)	800mm (31.50 inches)	DLDET42U88
			1000mm (39.37 inches)	DLDET42U810
			1200mm (47.24 inches)	DLDET42U812
45U	2120mm (83.46 inches)	600mm (23.62 inches)	800mm (31.50 inches)	DLDET45U68
			1000mm (39.37 inches)	DLDET45U610
			1200mm (47.24 inches)	DLDET45U612
		800mm (31.50 inches)	800mm (31.50 inches)	DLDET45U88
			1000mm (39.37 inches)	DLDET45U810
			1200mm (47.24 inches)	DLDET45U812
47U	2200mm (86.61 inches)	600mm (23.62 inches)	800mm (31.50 inches)	DLDET47U68
			1000mm (39.37 inches)	DLDET47U610
			1200mm (47.24 inches)	DLDET47U612
		800mm (31.50 inches)	800mm (31.50 inches)	DLDET47U88
			1000mm (39.37 inches)	DLDET47U810
			1200mm (47.24 inches)	DLDET47U812

• Custom configurations also available upon request, please contact our Sales team for more information

