

Server Cabinets

DESCRIPTION

Our Sframe™ Server Cabinets are designed to accommodate heavier rack-mount equipment such as servers and power supplies while offering convenient entry points for any installation and maintenance tasks.


FEATURES



mounting posts with unit notation



half-height side panels for easy access

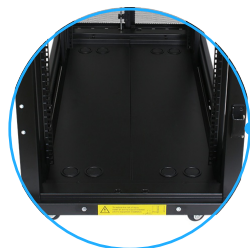

cable entry ports in cabinet base and top



rugged frame to support heavy loads



swing-out rotary locks on doors



SPECIFICATIONS

- 19-inch mounting width suitable for most networking equipment
- Conforms to industry standard ANSI/EIA-310-D and IEC 60297-3 mounting configurations
- 1000kg (2205lbs) static load capacity
- Body and frame fabricated from cold rolled steel
- Matte black powder-coated finish (also available in white)




OPTIONS

Sframe™ Server Cabinets are offered with an option of three types of top covers:

Fan (Default for 600mm wide racks)

Fan & Cable Entry (Default for 800mm wide racks)

Cable Tray (Optional)

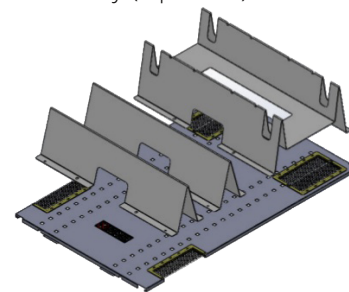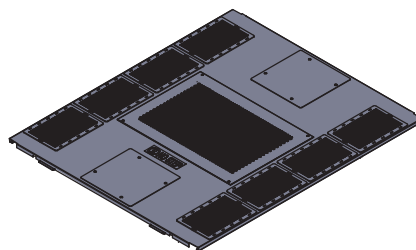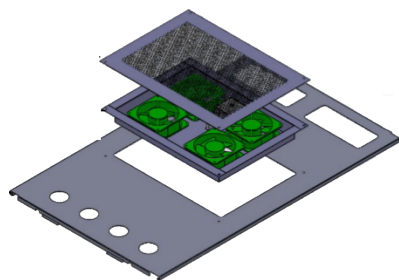


* The cable tray and fan unit is sold separately.

Sframe™ images, data, and content © 2015, 2016 Davis Legend. All rights reserved.



FRAME ASSEMBLY

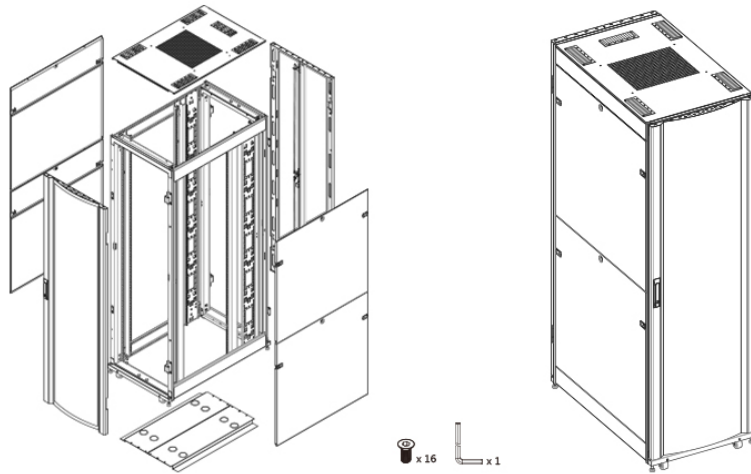

CONFIGURATIONS

Sframe™ Server Cabinets are offered in the following standard configurations

RACK UNITS	HEIGHT	WIDTH	DEPTH	PART NUMBER	COLOR
18U	935mm (36.81 inches)	800mm (31.50 inches)	800mm (31.50 inches)	SCB-PKST-03-18U88-RL	CBK(black) CWH(white)
27U	1320mm (51.97 inches)	600mm (23.62 inches)	800mm (31.50 inches)	SCB-PKST-03-27U68-RL	
			1000mm (39.37 inches)	SCB-PKST-03-27U610-RL	
		800mm (31.50 inches)	800mm (31.50 inches)	SCB-PKST-03-27U88-RL	
			1000mm (39.37 inches)	SCB-PKST-03-27U810-RL	
42U	2000mm (78.74 inches)	600mm (23.62 inches)	800mm (31.50 inches)	SCB-PKST-03-42U68-RL	
			1000mm (39.37 inches)	SCB-PKST-03-42U610-RL	
			1200mm (47.24 inches)	SCB-PKST-03-42U612-RL	
		800mm (31.50 inches)	800mm (31.50 inches)	SCB-PKST-03-42U88-RL	
			1000mm (39.37 inches)	SCB-PKST-03-42U810-RL	
			1200mm (47.24 inches)	SCB-PKST-03-42U812-RL	
45U	2120mm (83.46 inches)	600mm (23.62 inches)	800mm (31.50 inches)	SCB-PKST-03-45U68-RL	
			1000mm (39.37 inches)	SCB-PKST-03-45U610-RL	
			1200mm (47.24 inches)	SCB-PKST-03-45U612-RL	
		800mm (31.50 inches)	800mm (31.50 inches)	SCB-PKST-03-45U88-RL	
			1000mm (39.37 inches)	SCB-PKST-03-45U810-RL	
			1200mm (47.24 inches)	SCB-PKST-03-45U812-RL	
47U	2200mm (86.61 inches)	600mm (23.62 inches)	800mm (31.50 inches)	SCB-PKST-03-47U68-RL	
			1000mm (39.37 inches)	SCB-PKST-03-47U610-RL	
			1200mm (47.24 inches)	SCB-PKST-03-47U612-RL	
		800mm (31.50 inches)	800mm (31.50 inches)	SCB-PKST-03-47U88-RL	
			1000mm (39.37 inches)	SCB-PKST-03-47U810-RL	
			1200mm (47.24 inches)	SCB-PKST-03-47U812-RL	

- Standard configurations can be ordered as <PART NUMBER>-<COLOR> (eg. SCB-PKST-03-42U810-RL-CBK)
- Custom configurations also available upon request, please contact our Sales team for more information

