24 WAY PATCH PANEL CAT6A SHIELDED

DESCRIPTION

Sharkrack™ patch panels offer high performance and reliability. Designed to be easily installed to meet the requirements of all CAT6A Shielded networking by incorporating removable CAT6A Shielded Keystone Jacks for a more customised solution.




SPECIFICATIONS

- Cat6A 24-port shielded patch panels exceed Cat6A 550MHz connecting hardware requirements; comply with 10 Gigabit Ethernet application system, suit for interaction and termination of horizontal cabling between devices equipment and centralized points.
- The Cat6A 24-port patch panels have unique exterior design, simple and compact.
- The unique designed PCB reduces EMI/RFI interference, with low attenuation loss and high return loss
- High strength die-casted zinc alloy shielded design meets the industry standards.
- Meet the requirements of both T568A and T568B, with clear color labels.
- Solid and anticorrosive phosphor bronze IDC guarantees 250 terminations.
- Accept 23-26 AWG wires; phosphor bronze contact with 50μ"gold plating, withadurabilityof1500 matching recycles.
- All ports are clearly labeled, suitable for 19" equipment racks, cabinets and wall mount shelf.
- With backward compatibility of Cat 6 or lower level.

LOSS AND RESISTANCE

Description	Parameter
Contact resistance(max)	100mΩ
Insulation resistance(min)	500mΩ
Return loss(dB)	5.9dB

DIMENSIONS

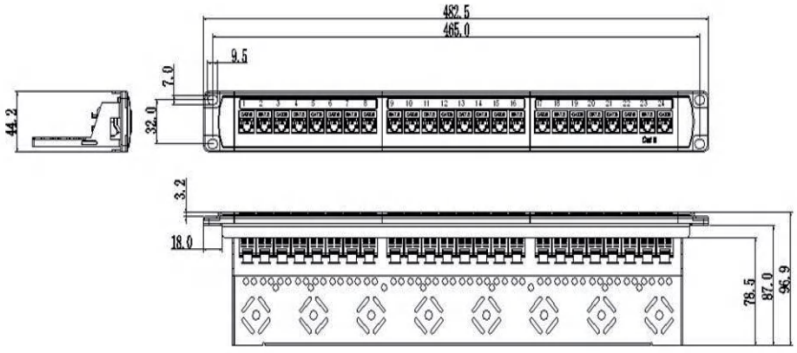

CONFIGURATIONS

PART NUMBER	DESCRIPTION	HEIGHT	WIDTH	DEPTH
DPPC6AS24	SharkRack 24 Port Patch Panel Cat6A STP Fully Loaded	44.2mm (1.74 inches)	482.5mm (19 inches)	96.9mm (3.81 inches)

V2024.1

SHARKRACK™ images, data, and content © 2015, 2016 Davis Legend. All rights reserved.