


# Standard Cabinets

## DESCRIPTION

Our **Sframe™ Standard Cabinets** are engineered for quick assembly and immediate use in your data center operations, with specifications designed to accommodate installation of any standard rack-mounted networking equipment

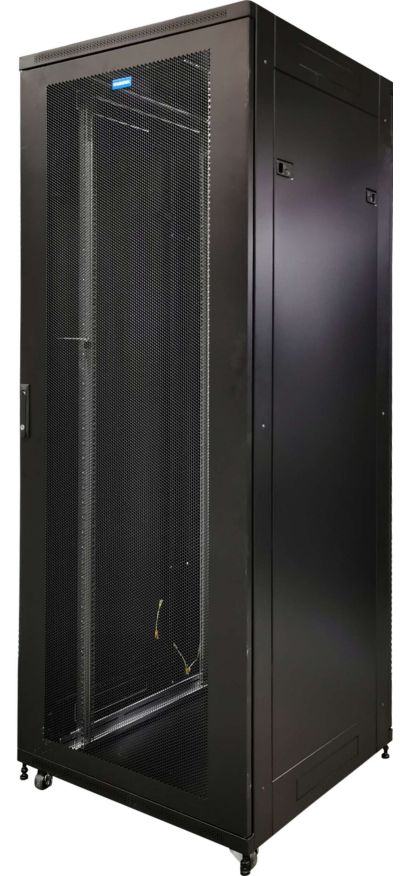

## SPECIFICATIONS

- **19-inch mounting width** suitable for most networking equipment Conforms to
- industry standard **ANSI/EIA-310-D** and **IEC 60297-3** mounting configuration
- **1000kg (2205lbs) static load capacity**
- Body and frame fabricated from **cold rolled steel**
- Matte black **powder-coated finish**
- Front Vertical Cable Management with covers (for 800mm Wide Racks only)

## DOOR OPTIONS

**Sframe™ Standard Cabinets** are offered with an option of four types of door options:



perforation mesh door D (default front for 800mm wide range)



perforation barn door F (default rear for 800mm wide range)



smokey-gray glass door B (default front for 600mm wide range)



steel casement door A (default rear for 600mm wide range)

Sframe™ images, data, and content © 2015, 2016 . All rights reserved.



## CABINET CONFIGURATIONS

NO.	ITEM	QTY	UNIT	MATERIAL	SURFACE FINISH	REMARKS
1	Top cover	1	PC	1.2mm cold-rolled steel	Powder coating	4 removable cable passing pedestal included
2	Frame	2	PC	1.2mm cold-rolled steel	Powder coating	----
3	Front door	1	PC	1.2mm perforation steel	----	----
4	Side panel	2	PC	1.2mm cold-rolled steel	Powder coating	With lock latch
5	Rear door	1	PC	1.2mm split perforation steel	Powder coating	
6	Lock	2	PC	----	----	----
7	Mounting rail	4	PC	2.0mm cold-rolled steel	Powder coating	----
8	Mounting angle	6	PC	1.5mm cold-rolled steel	Powder coating	
9	Bottom plate	1	PC	1.2mm cold-rolled steel	Powder coating	4 removable cable passing pedestal included
10	Vertical C/M	2	PC	1.2mm cold-rolled steel	Powder coating	Only for 800mm wide racks
11	Fan & Thermostat	1	PC	----	----	Optional part and to be ordered separately
12	Caster Front/Rear	4	PC	----	----	2x with brake & 2x without
13	Supporting foot	4	PC	----	----	----
14	M6 screw and nut	40	set	----	----	20 sets for 18U/27U

## CONFIGURATIONS

**Standard Cabinets** are offered in the following standard configurations - **stock only available by order for SKU marked with "\*"**

RACK UNITS	CABINET HEIGHT	CABINET WIDTH	CABINET DEPTH	PART NUMBER	DOOR	COLOR	
18U	988mm (38.90 inches)	600mm (23.62 inches)	600mm(23.62 inches)	SCB-PKST-DB-18U66	D (perforation steel door)	CBK (black)	
			800mm(31.50 inches)	SCB-PKST-DB-18U68			
27U	1388mm (54.65 inches)		600mm(23.62 inches)	SCB-PKST-DB-27U66			
			800mm(31.50 inches)	SCB-PKST-DB-27U68			
			1000mm(39.37 inches)	SCB-PKST-DB-27U610			
37U(by order)	1833mm (72.16 inches)		800mm(31.50 inches)	SCB-PKST-DB-37U68 *			
		600mm (23.62 inches)	600mm(23.62 inches)	SCB-PKST-DB-42U66			A (steel casement door)
			800mm(31.50 inches)	SCB-PKST-DB-42U68			
42U	2055mm (80.91 inches)		1000mm(39.37 inches)	SCB-PKST-DB-42U610			
		800mm (31.50 inches)	800mm(31.50 inches)	SCB-PKST-DB-42U88			B (smokey-gray glass door)
			1000mm(39.37 inches)	SCB-PKST-DB-42U810			
			1200mm(47.24 inches)	SCB-PKST-DB-42U812 *			
		600mm (23.62 inches)	600mm(23.62 inches)	SCB-PKST-DB-45U66	F (split perforation steel door)	CWH (white) (Optional)	
			800mm(31.50 inches)	SCB-PKST-DB-45U68			
45U	2150mm (84.65 inches)		1000mm(39.37 inches)	SCB-PKST-DB-45U610			
			1200mm(47.24 inches)	SCB-PKST-DB-45U612 *			
		800mm (31.50 inches)	800mm(31.50 inches)	SCB-PKST-DB-45U88			
			1000mm(39.37 inches)	SCB-PKST-DB-45U810			
			1200mm(47.24 inches)	SCB-PKST-DB-45U812 *			
		600mm (23.62 inches)	600mm(23.62 inches)	SCB-PKST-DB-47U66 *			
			800mm(31.50 inches)	SCB-PKST-DB-47U68 *			
47U (by order)	2278mm (89.69 inches)		1000mm(39.37 inches)	SCB-PKST-DB-47U610 *			
			1200mm(47.24 inches)	SCB-PKST-DB-47U612 *			
		800mm (31.50 inches)	800mm(31.50 inches)	SCB-PKST-DB-47U88 *			
			1000mm(39.37 inches)	SCB-PKST-DB-47U810 *			
			1200mm(47.24 inches)	SCB-PKST-DB-47U812 *			

- Standard configurations can be ordered as <PART NUMBER>-<COLOR> (eg. **SCB-PKST-DB-42U88-DF-CBK**)
- **Custom configurations also available upon request**, please contact our Sales team for more information

